

Video Security



WFL-II/LED15-12

LED-Infrared Illuminator 950nm,
Wide Flood, 15W, 12VDC

Art-No. 73826



Features

Power Rating: 15 W
Spectral Emission: 950 nm
Narrow-band Light Emission
Beam Angle: 40°

Protection Rating: IP66
Vibration-resistant
Low Self-heating
No Maintenance Required

Specifications

Lamp type	LED
Spectral emission	950nm
Spectral half-value range	80nm
Angle of light source h/v	40°
Scene coverage	15m
75% reduced light emission after	>100,000h
Twilight switch	optional
Heating above ambient air temperature	Max. 35°C
Power supply unit	optional
Protection rating	IP66
Supply voltage	12VDC (±0.5V)
Power consumption at nominal voltage	Approx. 15W
Current consumption	Approx. 1.25A
Temperature range (Operation)	-30°C ~ +50°C
Housing	Aluminium with plastic cover
Dimensions (HxWxD)	66x66x55 mm
Weight	350g

Accessories

73827 / NE-109N

Power Supply 110-240VAC/12VDC for one LED-Infrared Illuminator 15W, Regulated

71310 / WD-8/MK

Wall Mount with Swivel Head, 1/4" Camera Fixing Screw, Black Finish

70023 / WD-9N



Wall Mount with Ball Joint, 1/4" Camera Fixing Screw, Black Finish

73433 / DS-3

Twilight Switch with ON/OFF Delay adjustable Switching Points, 230VAC

Product Information

The best result will be achieved on condition that a camera is used with good sensitivity in the infra-red range, a relative lens aperture of F1.4 min. and a mean reflectance factor for spotlight objects.

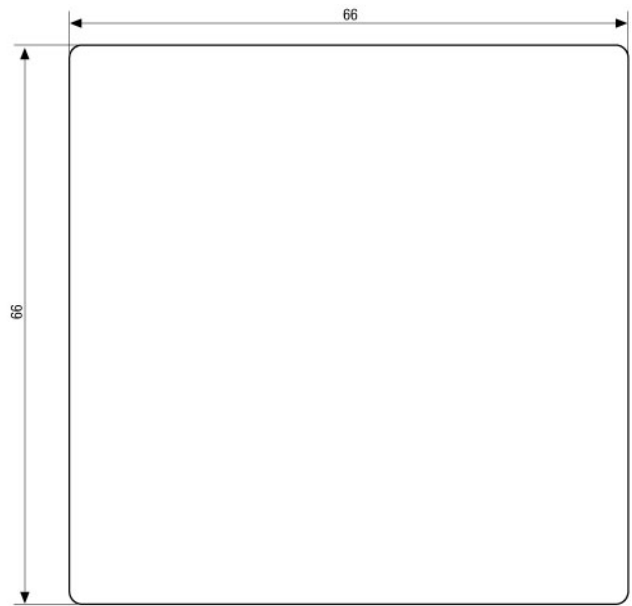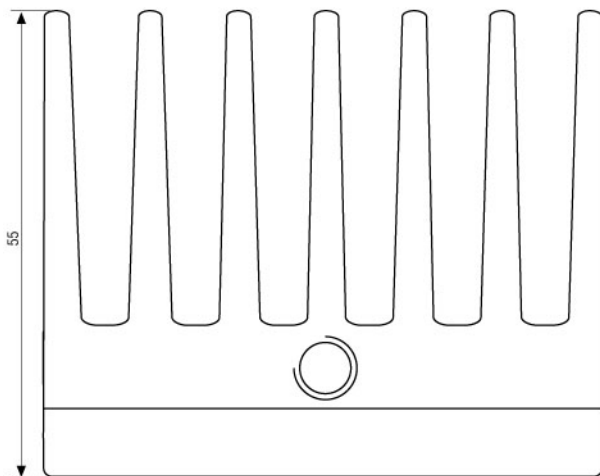

Befestigungsgewinde 1/4"
Fixing thread 1/4"

Maße/Dimensions: mm

SLD Security & Communications
The Old Forge, Ockham Lane, Ockham, Surrey GU236PH England
Phone +44.1483225633 · Fax +44.1483225634
sales@sld.co.uk · www.sld.co.uk

