



The Videojet 8000 features 8 non-multiplexed MPEG-2 video streams simultaneously over Gigabit-Ethernet and ISDN. With a maximum data rate of 480 fully interlaced DVD-quality fields per second the device provides superb video with best use of bandwidth.

Its video signal can be viewed on any standard PC using software decoder VIDOS or a web browser. With one of MPEG-2 hardware receivers you can put up box-to-box solutions. Optionally the Videojet 8000 comes with a video output to be linked to a CCTV monitor for local display.


With its integrated hard disk of 120, 240 or 600 GByte the Videojet 8000 allows simultaneous playback and back-up while recording.

The device comes as 1 HU-high rack-mount or desktop unit offering highest port density and all well-proven security and management features. For special demands it is also available with 8-channel full-duplex audio.

HIGHLIGHTS

- > Modular digital CCTV matrix
- > 8 independent, non-multiplexed streams
- > MPEG-2 @ full D1/CIF
- > Fully interlaced video
- > Integrated hard disk (120, 240 or 600 GB)
- > Triplex hard disk recording
- > GigabitEthernet & ISDN
- > 10 alarm inputs & USB interface
- > Integrated video scene analysis
- > Comprehensive security features
- > Multicasting & Internet Streaming

EXAMPLE

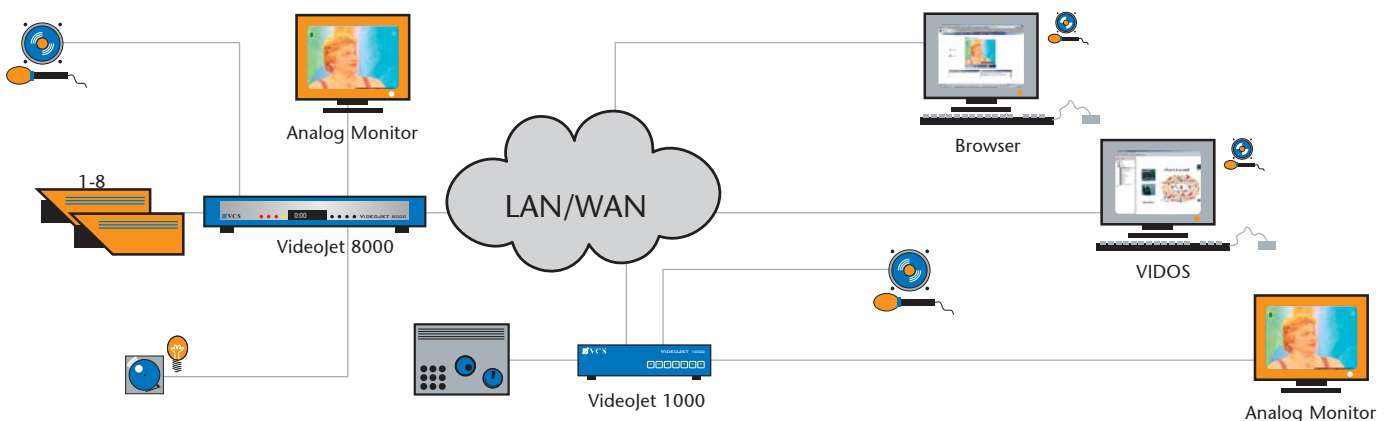

TECHNICAL DATA

SPECIFICATIONS


Video Standards	ISO/IEC 13818-2 (MPEG-2) MP@ML; M-JPEG
Video Data Rate	1 MBit/s - 5 MBit/s per channel Constant & variable
Video Resolution	720 x 576 (full D1: 50 resp. 60 fields/s**) 352 x 288 (CIF: 25 resp. 30 fps**)
GOP Structure	I, IP, IPB, IPBB
Overall Delay (IP)	198 resp. 180 ms (PAL resp. NTSC)
Select. Frame Rate	1-50 resp. 60 fields/s (PAL resp. NTSC); Field/frame based coding
Audio Standards*	MPEG-1: ISO/IEC 11172-3; MPEG-2: Layer I/II; 300 Hz - 10 kHz
Audio Data Rate*	256 kBit/s
Audio Sampl. Rate*	48 kHz
Multiplex Standards	ISO/IEC 13818-1 (MPEG-2)
Stream Types	Elementary (video only), program stream
Network Protocols	RTP, Telnet, UDP, TCP, IP, HTTP, IGMP, ICMP, ARP, SNMP
Software Update	Flash ROM, remote programmable
Configuration	Via Web browser, built-in Web server

INTERFACES


Video In	8x analog composite: NTSC or PAL; BNC connector 75 Ohm switchable, 0.7-1.2 Vpp
Video Out*	1x analog composite: NTSC or PAL; BNC connector 75 Ohm, 1 Vpp
Audio*	8x mono line in (50 kOhm), 8x mono line out (60 mW, min. 8 Ohm), stereo jack 3.5 mm, 1 Vpp or: 8x stereo line, stereo jack 3.5 mm, 50 kOhm, 1 Vpp
Alarm In	10x clamp (non-isolated closure contact type), max. activation resistance 10 Ohm
Relay Out*	5x clamp, 30 Vpp, 1 A
COM Ports	1x RS232/422/485, RJ45; 1x RS232*, 9-pin Sub-D
USB Port***	1x 2.0 external interface
Ethernet	10/100/1000 Base-T, autosensing, half/full duplex, RJ45
ISDN***	RJ45, SO-Basic-rate
Storage Media	120, 240 or 600 GB HD integrated

POWER, ENVIRONMENTAL, APPROVALS

Input Voltage	90 - 250 VAC, 50/60 Hz
Power Consumption	Max. 60 VA
Weight	App. 6.0 kg with 240 GB HD
Operating Temp.	0 - 50 °C (32 - 122 °F) ambient temperature
Humidity	20 - 80%, atmospheric humidity (not cond.)
Approvals	CE: IEC 60950; UL 1950; J 60950; AS/NZS 3548; EN 55103-1, -2; EN 55130-4; EN 55022; EN 55024; EN 61000-3-2; EN 61000-3-3; FCC 47 CFR Ch.1 Part 15

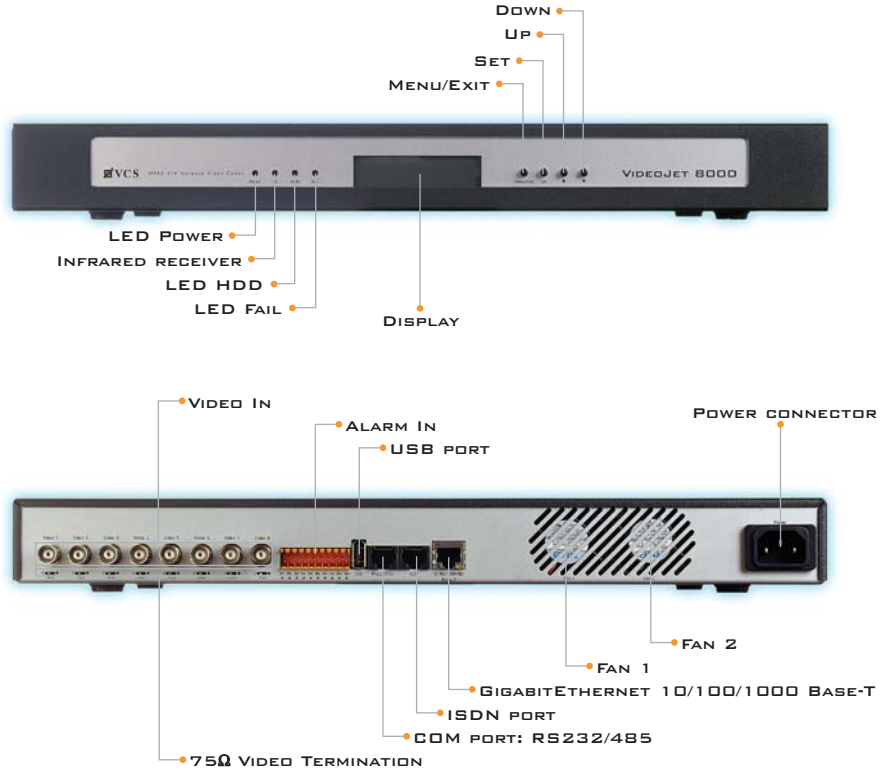

SIZES IN MM (INCHES)

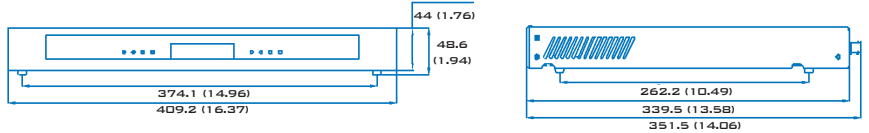

RACK MOUNT KIT

ORDERING INFORMATION

ARTICLE-CODE	DESCRIPTION
2906	VideoJet 8000/120GB Octal-input MPEG-2 DVR & Transmitter with 120 GB HD
2926	VideoJet 8000/240GB Octal-input MPEG-2 DVR & Transmitter with 240 GB HD
2927	VideoJet 8000/600GB Octal-input MPEG-2 DVR & Transmitter with 600 GB HD
2907	VideoJet 8000 A/120GB Octal-input MPEG-2 DVR & Transceiver with 8-channel Audio and 120 GB HD
2936	VideoJet 8000 A/240GB Octal-input MPEG-2 DVR & Transceiver with 8-channel Audio and 240 GB HD
2937	VideoJet 8000 A/600GB Octal-input MPEG-2 DVR & Transceiver with 8-channel Audio and 600 GB HD
On request	Web Toolkit, SDK, RCP+ Reference

CONTENT OF DELIVERY

- VideoJet 8000 with internal wide range power supply incl. IEC power cable
- RS232 Null modem cable
- Accessory Kit (19" rack mounting)
- Quick Installation Guide (german/english)
- CD-ROM with manual (german/english) and VCS software

*only with audio version **depends on picture content ***supported with later firmware version

SLD Security & Communications

The Old Forge
Ockham Lane
Ockham
Surrey
GU23 6PH
England

Tel: +44(0)1483 225633 Fax: +44(0)1483 225634

Email: sales@sld.co.uk Web: http://www.sld.co.uk/

